


CONNECTOR PIN OUT MORTOR			
PIN #	WIRE	FUNCION	WIRE GAUGE
1	Blue	PHASE*U*	UL3266-20AWG
2	Purple	PHASE*V*	UL3266-20AWG
3	Gray	PHASE*W*	UL3266-20AWG

CONNECTOR PIN OUT HALL SENSOR			
PIN #	WIRE	FUNCION	WIRE GAUGE
4	Yellow	Vcc	UL3266-24AWG
5	Green	GND	UL3266-24AWG
6	Palm	S1	UL3266-24AWG
7	Red	S2	UL3266-24AWG
8	Orange	S3	UL3266-24AWG

PLANETARY GEAR BOX	
RATIO	L
1/4.5-1/8	50
1/20-1/50	66
1/91-1/312	81

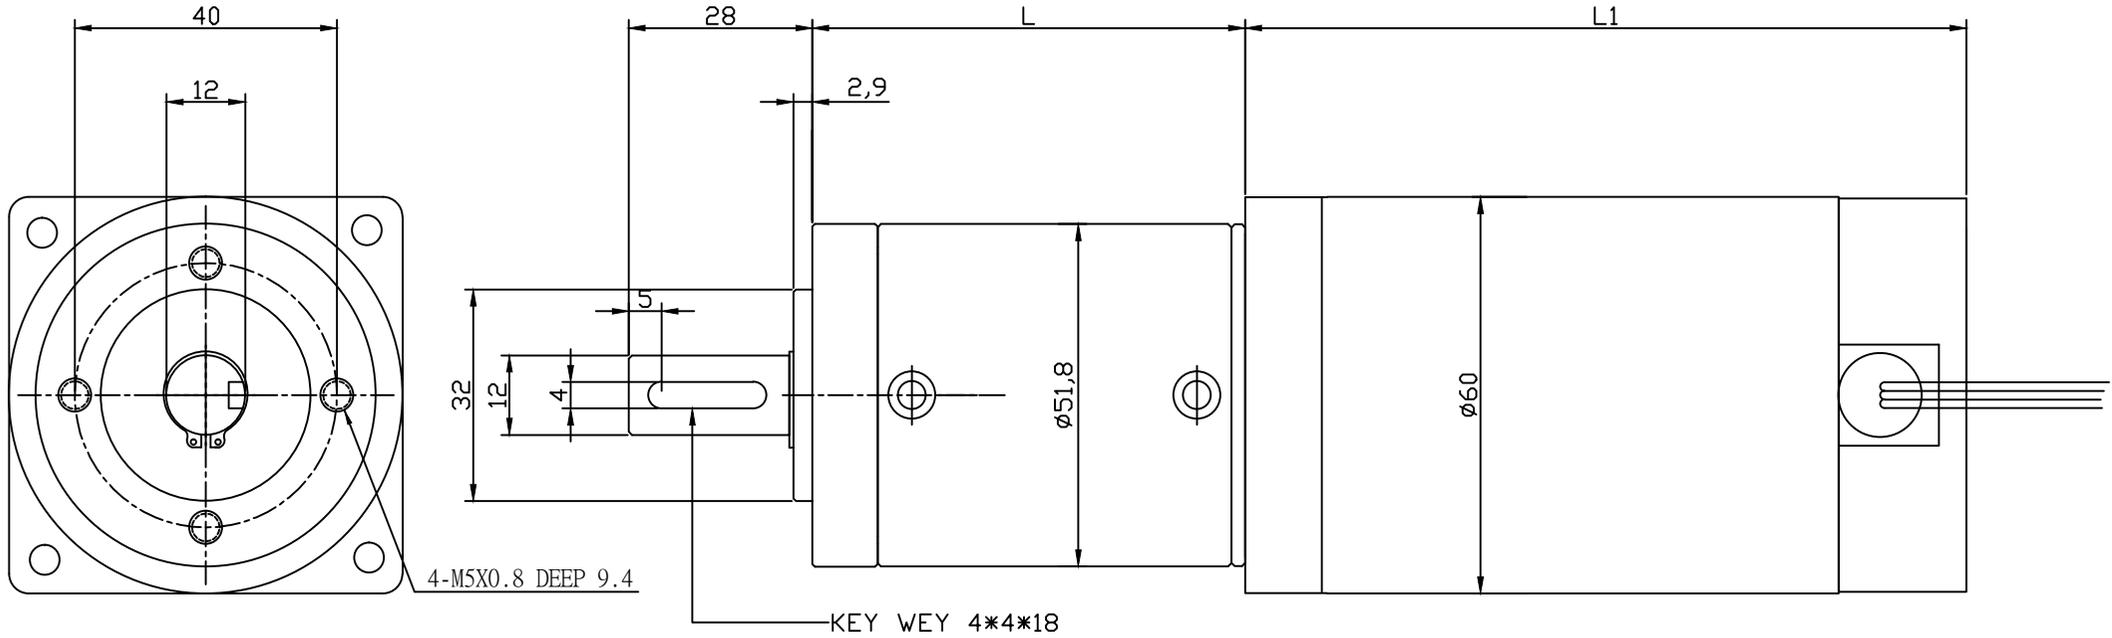

	BLDC60-L	BLDC60-M	BLDC60-S
L1	109	84.5	59.5
Read Voltage	24VDC	24VDC	24VDC
Nolad Speed	4000RPM	3900RPM	4200RPM
Nolad Current	0.9A	0.5A	0.5A
Direction of Rotation	C.W.	C.W.	C.W.
Rated Power	120W	80W	40W
Reated Torque	3.9Kg-cm	2.6Kg-cm	1.3Kg-cm
Rated Current	8.0A	3.0A	3.0A
Rated Speed	3000RPM	3000RPM	3000RPM

設計	Wing	比例	1:1
繪圖	Wing	單位	M/M
日期	05/21/2014		

微動力科技有限公司  
DORYOKU TECHNICAL CORP.

圖號 P52-BLDC60